



SENNHEISER

# Sennheiser Sonite R


Technical Data




## S Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

### Output sound pressure level

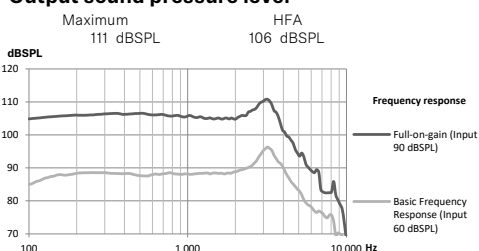

### Acoustic gain

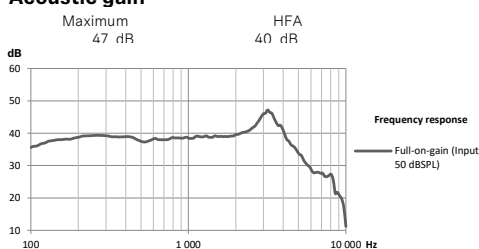


Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,5%	2,0%	2,0%	1,0%
Expected operating time*	18 h			
Equivalent input noise level	19 dBSPL			


## M Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

### Output sound pressure level

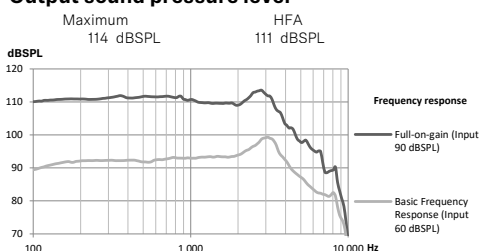

### Acoustic gain

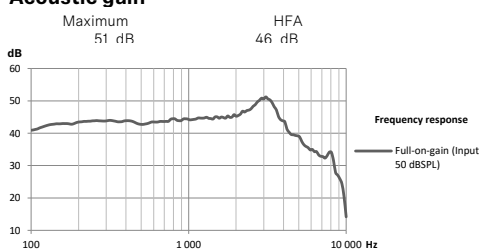

Frequency range	<100 Hz - >8000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,5%	2,0%	2,0%	1,0%
Expected operating time*	18 h			
Equivalent input noise level	19 dBSPL			

### General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings
- The latency of the audio signal determined according an internal standard is 6.2 ms

### Warnings

- ⚠ This hearing instrument has an output sound pressure level that can exceed 132 dB SPL. Special care should be taken when fitting this instrument as there is a risk of impairing the residual hearing of the user.
- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.
- ⚠ The developed SPL in the ears of children can be substantially higher than in average adults. RECD measured to correct target of fitted OSPL90 is recommended.

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.



0459



Sonova AG  
Laubisrütistrasse 28  
CH-8712 Stäfa, Switzerland

A brand licensed by Sonova.

V1.00/2024-04/BJ © 2024 Sonova AG All rights reserved/page 1/2



**SENNHEISER**


# Sennheiser Sonite R

Technical Data


## P Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

### Output sound pressure level

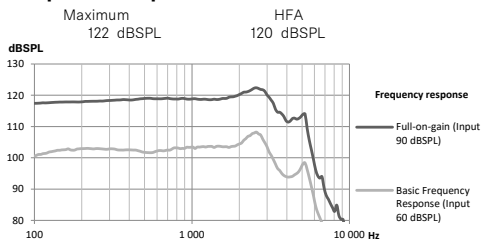

### Acoustic gain

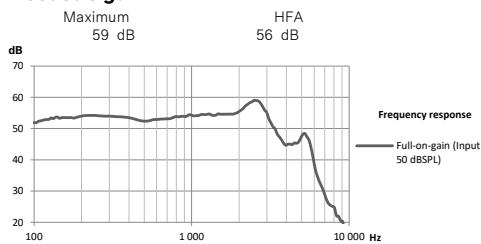


Frequency range	<100 Hz - 6300 Hz (CeruShield)			
	<100 Hz - 5900 Hz (CeruStop)			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,0%	1,5%	1,0%	1,0%
Expected operating time*	18 h			
Equivalent input noise level	19 dBSPL			


## UP Receiver 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014 (R2020)  
IEC 60118-0 : 2022

### Output sound pressure level

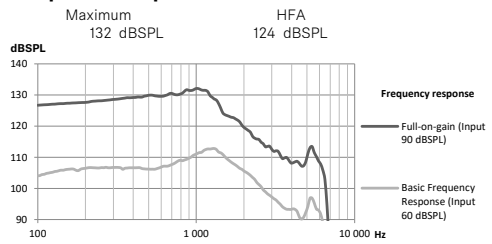

### Acoustic gain

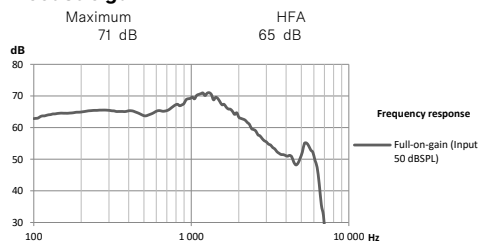

Frequency range	<100 Hz - 6100 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1,5%	1,5%	1,0%	1,0%
Expected operating time*	18 h			
Equivalent input noise level	19 dBSPL			

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.