



# Sennheiser Sonite R

Product information



# Product description

# Premium performance



## Sonite R

Multi-function button		•
Telecoil		
Bluetooth®		•
Hydrophobic coating		•
IP rating		IP68 <sup>1</sup>
Dimensions	L x W x D	27.7 x 12 x 8.1 mm (1.09 x 0.47 x 0.32")
	Weight	2.2 g (0.08 oz)
Charging times <sup>2</sup>	0% to 100%	3 h
	0% to 80%	1.5 h
	30 min. fitting	15 min.
<b>S Receiver</b>		
Max. Power Output (dB SPL)	2 cc coupler	111
Max. gain (dB)	2 cc coupler	47
Frequency range (Hz)		<100 - >8000
<b>M Receiver</b>		
Maximum Power Output (dB SPL)	2 cc coupler	114
Max. gain (dB)	2 cc coupler	51
Frequency range (Hz)		<100 - >8000
<b>P Receiver</b>		
Maximum Power Output (dB SPL)	2 cc coupler	122
Max. gain (dB)	2 cc coupler	59
Frequency range (Hz)		<100 - 6300 (CeruShield) <100 - 5900 (CeruStop)
<b>UP Receiver</b>		
Max. Power Output (dB SPL)	2 cc coupler	132
Max. gain (dB)	2 cc coupler	71
Frequency range (Hz)		<100 - 6100

## Automatic

Echo	•
Car	•
Loud Noise	•
Music	•
Comfort	•
Noise	•
Quiet	•
Streamed speech	•
Streamed music	•

## Additional programs

Max. additional programs	4
Echo	•
Loud Noise	•
Speech Direct	•
Noise	•
Quiet	•
Comfort	•
Music	•
Acoustic phone	•
Custom program	•

## Streaming programs

PartnerMic + mic	•
Phone call + mic	•
Remote Control	•

## Features

Speech Manager	•
Speech Boost	•
Narrow Speech Focus 2.0	•
Dynamic Noise Manager	•
Motion Sense	•
Directional Microphone	•
Echo Manager	•
Touch Control	•
- Siri/Google Assistant	
- Pause/resume streaming	
- Accept/end phone call	
Impulse Manager	•
DuoTel	•
Real Ear Effect	•
Health	•
Wind Manager	•
User Preference Tuning	•
Adaptation Control	•
HiFrequency Protect+	•
Feedback Manager	•
Noise Manager	•
Binaural Sync	•
AOV	•
Finetuning channel	20

# Housing colors



2A

Silver/black



3A

Graphite/black



6A

Sandalwood/black

<sup>1</sup> IP68 indicates that the hearing aid is water and dust resistant. It survived continuous immersion in 1 meter of fresh water for 60 minutes and 8 hours in a dust chamber as per the IEC60529 standard.

<sup>2</sup> Actual charging time depends on the remaining battery life, but it will not exceed 3 hours.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Sonova AG is under license.


# Fitting

	Sonite R
Target	10.0 or higher
Noahlink Wireless, Noahlink Wireless 2	•

## Acoustic coupling

	S Receiver	M Receiver	P Receiver	UP Receiver
<b>Length</b>				
Available in four different lengths (0, 1, 2, 3), left and right	•	•	•	•
<b>Dome</b>				
Cap dome	•	•	•	
Open dome Available in three sizes (S, M, L)	•	•	•	
Vented dome Available in three sizes (S, M, L)	•	•	•	
Power dome Available in three sizes (S, M, L)	•	•	•	
<b>SlimTip*</b>				
Acrylic	•	•	•	
Silicone	•	•	•	
<b>cShell</b>				
Acrylic	•	•	•	•
Titanium	•	•	•	•
<b>Fitting ranges</b>				

\*Available with extra canal length option

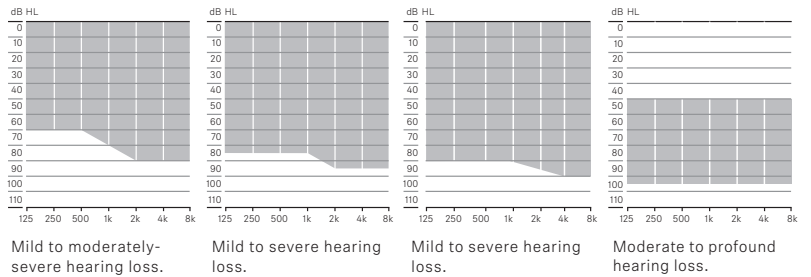

# Sennheiser Sonite R charging options



## Sennheiser Sonite Charger R

The Sonite Charger is a compact charger with magnets in the charging slots that make it easy to insert and remove Sennheiser Sonite R. It uses a standard USB-C charging port that lights up when power is applied.

## Sennheiser Sonite R Bluetooth® versions

### Direct calls / audio streaming

Bluetooth 4.2 wireless technology and most older Bluetooth phones



## Wireless communication portfolio

	Sonite R
<b>Wireless accessory</b>	
Easy Line TV Connector	•
Easy Line PartnerMic	•
Easy Line RemoteControl	•
<b>Apps</b>	
Easy Line Remote	•

For more information, visit [hearingaids.sennheiser-hearing.com](https://hearingaids.sennheiser-hearing.com)